


DRAFT

REVISIONS

REV.	DESCRIPTION	ECO #	DATE	APPROVED

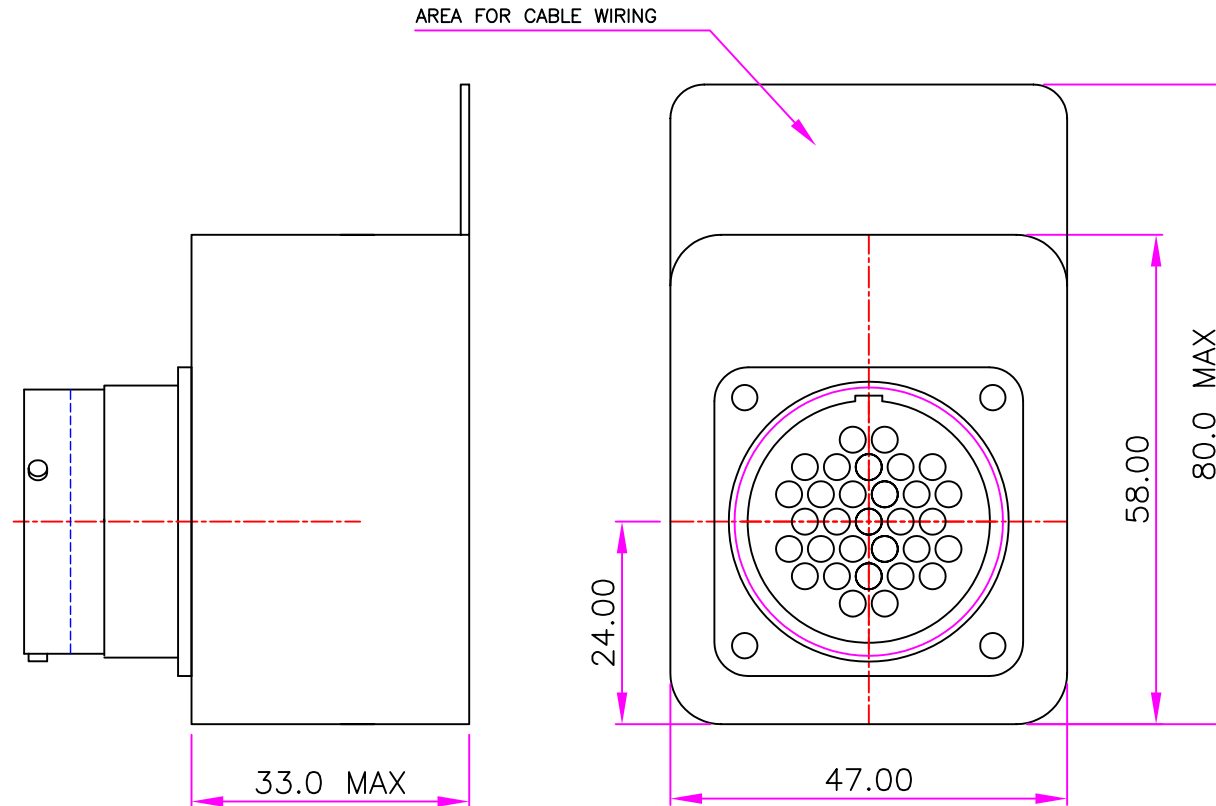

ENVIRONMENTAL:

- TEMP. = -55°C TO 100°C
- SHOCK = 40g X 6msec
- VIBRATION = 10g RMS @ 50 TO 2000 Hz
- HUMIDITY = UP TO 95% R.H.

MATERIAL:

- SHELL = ALUMINUM, OLIVE DRAB CADMIUM.
- BACK SHELL = ALUMINUM, TIN / NICKEL PLATE.
- CONTACTS = COPPER ALLOY, GOLD PLATED OVER NICKEL.
- POTTING = EPOXY.

NOTE:

THE CONNECTOR BASED ON RD10A20-31PN

RF Immunity LTD		NAME & SIGNATURE	DATE
		DRAWN NIR NISSIM	03.04.06
VIEW ↖ ⊕	TITLE: CD FILTER CONNECTOR RECEPTACLE, 20-31PN	CHECKED	DESIGN
DIM. IN mm		PA	APPROV.
SCALE NONE	DWG. NO.: BLM592	REV. 3	SHEET 1 OF 2 GEN. TOL. ±1.0