
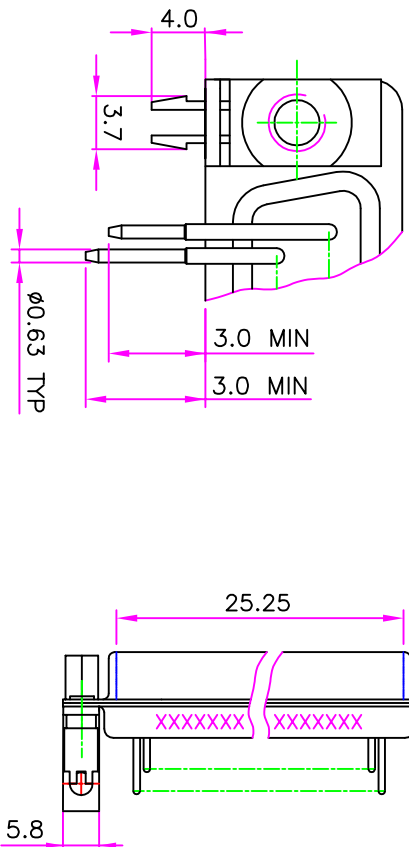


1	2	3	4	5	ENG. SIGNATURE	QA SIGNATURE	CUSTOMER SIGNATURE	REV.	DESCRIPTION	DATE	APPROVED

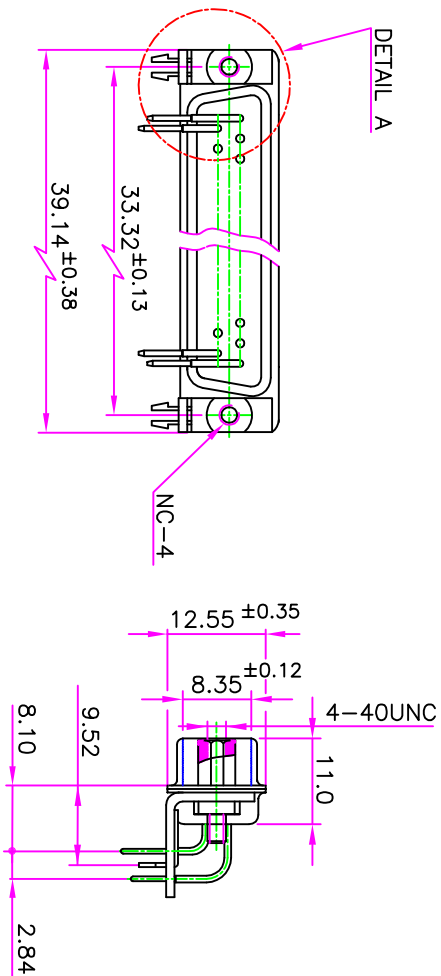

ELECTRICAL:

I = 7.5amp
 W.V = PER TABLE 1
 D.W.V = PER TABLE 1
 TYPICAL CAP. = PER TABLE 1 ±20%
 ATTENUATION PER MIL-STD-220A
 (IN 500 SYSTEM NO LOAD) PER TABLE 1.

TABLE 1:

CONT. No.	CAP. TYPE	W.V	D.W.V @5sec.	ATT. db					
				1M	5M	10M	100M	1G	
ALL CONTACTS	470pF	C	200V	500Vdc	-	-	1	15	32

ENVIRONMENTAL:

TEMP. = -55°C TO 105°C
 SHOCK = 40g X 11msec
 VIBRATION = 20g RMS @ 20 TO 2000 HZ
 HUMIDITY = UP TO 95% R.H.

MATERIAL:

SHELL = STEEL, TIN PLATED.
 CONTACTS = MACHINED FLASH GOLD

TEDER



VIEW TITLE : CD

CD
 FILTER CONNECTOR
 15 P CONTACTS

DIM. IN mm

SCALE NONE

DWG. NO.: TD151394FA30

DRAWN		NAME & SIGNATURE		DATE	
CHECKED	ELIA	ELIA	03.04.03		
DESIGN	ELIA		03.04.03		
PA					
APPROV.	NIR		03.04.03		
REV. NEW				SHEET 1 OF 1	GEN. TOL. ±0.4